

Gens ace | 

RC BATTERY

BROCHURES 2024







COMPANY INTRODUCTION

Founded in 1998, Grepow is widely regarded as one of the world's leading battery manufacturers. We specialize in special shapes, high discharge rates, LiPos, LiFePO4, and NiMH

batteries. With four factories and more than 3,500 employees worldwide, we are confident in the performance and reliability of our batteries.

In 2009, Gens Ace came about as a way to provide a budget-friendly and high-quality option to the RC market, and the brand has been growing as a household name among hobbyists ever since. With a wide selection of batteries for racers, crawlers, bashers, and pilots.

With the explosion of the drone market came the creation of Tattu in 2013. Focusing on FPV, multi-rotor, and UAV markets, Tattu designs high energy density and high discharge-rate cells.

Earning us the title of "Champion's Pick," we've won the majority of national and international competitions and have come to be the leading brand for best performance.



GENS ACE SOARING

Choose Gens Ace, let your flight model start to soar. Gens Ace Soaring provides feasible plan for flight model starters, who prefer flexible application and affordable price. Gens Ace Soaring is for electronic Jets to fly higher, Furthermore, the creative concept of "1TO3" adapter makes the battery series compatible to more models, so you can use one battery to float on water, to drive on land, and to fly in the air.



450mAh-11.1V-30C
Weight: 47g Size: 58*31*13.5mm



2200mAh-7.4V-30C
Weight: 122g Size: 104*34.5*14.5mm



3300mAh-14.8V-30C
Weight: 328g Size: 137*42.5*26mm





1000mAh-7.4V-30C

Weight: 63g Size: 69.5*34*11mm



2200mAh-11.1V-30C

Weight: 168g Size: 106*34*21mm



3300mAh-14.8V-30C

Weight: 376g Size: 136*42*29.5mm

AIR
RC BATTERY

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA4502S30JST	7.4V	450mAh	30	JST-SYP	56.5	31	9	33g
GEA4503S30JST	11.1V	450mAh	30	JST-SYP	58	31	13.5	47g
GEA10002S30X6	7.4V	1000mAh	30	XT60	69.5	34	11	63g
GEA10002S30T3	7.4V	1000mAh	30	EC3/XT60/T-plug	69.5	34	11	63
GEA10003S30X6	11.1V	1000mAh	30	XT60	71.5	35	17	89g
GEA10003S30T3	11.1V	1000mAh	30	EC3/XT60/T-plug	71.5	35	17	89g
GEA13002S30X6	7.4V	1300mAh	30	XT60	69.5	34	14.5	79g
GEA13002S30T3	7.4V	1300mAh	30	EC3/XT60/T-plug	69.5	34	14.5	79g
GEA13003S30X6	11.1V	1300mAh	30	XT60	71.5	35	21	107g
GEA13003S30T3	11.1V	1300mAh	30	EC3/XT60/T-plug	71.5	35	21	107g
GEA22002S30X6	7.4V	2200mAh	30	XT60	104	34.5	14.5	122g
GEA22002S30T3	7.4V	2200mAh	30	EC3/XT60/T-plug	104	34.5	14.5	122g
GEA22003S30X6	11.1V	2200mAh	30	XT60	106	34	21	168g
GEA22004S30X6	14.8V	2200mAh	30	XT60	107	34	27	214g
GEA27003S30X6	11.1V	2700mAh	30	XT60	103	33.5	25	190g
GEA27003S30T3	11.1V	2700mAh	30	EC3/XT60/T-plug	103	33.5	25	190g
GEA33002S30X9	7.4V	3300mAh	30	XT90	132.5	42	13.5	186g
GEA33003S30X9	11.1V	3300mAh	30	XT90	131	42.5	19.5	252g
GEA33004S30X9	14.8V	3300mAh	30	XT90	137	42.5	26	328g
GEA40002S30X9	7.4V	4000mAh	30	XT90	133	41.5	15.5	208g
GEA40003S30X9	11.1V	4000mAh	30	XT90	136	42.5	22.5	291
GEA40004S30E5	14.8V	4000mAh	30	EC5	136	42	29.5	376g



GENS ACE FLIGHT

When you want to have one-set service for flight model battery, Gens Ace Flight Series would be your top choice. Gens Ace Flight Series provides various batteries for multiple types of flight models, from 3-inch helicopter to scale electronic jets and gliders. Gens Ace Flight Series also contains transmitter/receiver package, so you can put your trust on its combining performance when playing with your model.



400mAh-7.4V-60C

Weight: 20g Size:41*20*13mm



750mAh-11.1V-60C

Weight: 59g Size:56*24*24mm



2200mAh-11.1V-45C

Weight: 190g Size:106*34*24mm



5000mAh-22.2V-60C

Weight: 735g Size:163*45*44mm



5000mAh-22.2V-60C

Weight: 1520g Size:320*50*49mm



2200mAh-11.1V-45C

Weight: 760g Size:149*50*52mm





5000mAh-14.8V-45C

Weight:550g Size:160*45*34mm



5000mAh-25.9V-45C

Weight: 824g Size:161*46*51mm



5800mAh-18.5V-60C

Weight: 669g Size:163*45*43mm

AIR
RC BATTERY

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA2001S45PH	3.7V	200mAh	45	JST-PHR	48.6	12	6	5g
GEA3003S45JST	11.1V	300mAh	45	JST-SYP	40	21	17	26g
GEA3002S35J	7.4V	300mAh	35	JST-SYP	42	16	12	19
GEA4002S60JST	7.4V	400mAh	60	JST	41	20	13	20g
GEA7003S60X3	11.1V	700mAh	60	XT30	58	22.5	23	52g
GEA7503S60X3	11.V	750mAh	60	XH	56	24	24	59g
GEA8002S45JS	7.4V	800mAh	45	JST-SYP-2P	56	29	15	47g
GEA8003S45JS	11.1V	800mAh	45	JST-SYP-2P	58	30	23	70g
GEA14506S45X6	22.2V	1450mAh	45	XT60	116	34	29	270g
GEA16002S45X6	7.4V	1600mAh	45	XT60	105	35	14	102g
GEA18002S45X6	7.4V	1800mAh	45	XT60	90	30	17	111g
GEA18003S45X6	11.1V	1800mAh	45	XT60	92	31	25	150g
GEA18006S45X6	22.2V	1800mAh	45	XT60	108	34	42	321g
GEA20006S60X6	22,2V	2000mAh	60	XT60	106	34	40	297g
GEA22003S45X6	11.1V	2200mAh	45	XT60	106	34	24	190g
GEA22003S45T3	11.1V	2200mAh	45	EC3/XT60/T-plug	106	34	24	190g
GEA25006S60X6	22.2V	2500mAh	60	XT60	133	44	36	405g
GEA28006S60X6	22.2V	2800mAh	60	XT60	117	35	49	410g
GEA6S300060E5	22.2V	3000mAh	60	EC5	140	43	39	496g
GEA33006S45E5	22.2V	3300mAh	45	EC5	137	42	44	568.4g
GEA37006S60E5	22.2V	3700mAh	60	EC5	137	42	47	606g



SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA40006S45E5	22.2V	4000mAh	45	EC5	160	47	41	613g
GEA40006S60E5	22.2V	4000mAh	60	EC5	136	42	53	671g
GEA45006S45E5	22.2V	4500mAh	45	EC5	46	46	45	714g
GEA50003S45X9	11.1V	5000mAh	45	XT90	45	45	26	418g
GEA50004S45E5	14.8V	5000mAh	45	XT90	45	45	34	550g
GEA50005S60X9	18.5V	5000mAh	60	XT90	45	45	37	594g
GEA6S500045E5	22.2V	5000mAh	45	EC5	48	48	45	717g
GEA6S500060E5	22.2V	5000mAh	60	EC5	45	45	44	735g
GEA50007S45X9	25.9V	5000mAh	45	XT90	46	46	51	824g
GEA500012S60E	44.4V	5000mAh	60	EC5	50	50	49	1520g
GEA6S510080E5	22.2V	5100mAh	80	EC5	50	50	52	760g
GEA55006S45E5	22.2V	5500mAh	45	EC5	45	45	54	805g
GEA6S560080E5	22.2V	5600mAh	80	EC5	49	49	55	863g
GEA58005S60X9	18,4V	5800mAh	60	XT90	45	45	43	669g
GEA60006S45E5	22.2V	6000mAh	45	EC5	46	46	55	830g



TRANSMIT

Transmitter & Receiver Lipo Batteries.





SKU	Voltage	Capacity	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA14002SRXJR	7.4V	1400mAh	JR plug	78	30	13	60g
GEA23002STXF	7.4V	2300mAh	Futaba-3P	78	41	17	130
GEA27002SRXFJ	7.4V	2700mAh	Futaba-3P+ JST-EHR-2P	92	31	16	93
GEA27003STXFJ	11.1V	2700mAh	Futaba/JST-XHR/ JST-SYP	92	29	24	147g
GEA30002STXJ	7.4V	3000mAh	JST-SYP	98	28.5	17.5	128g
GEA35001STXJR	3.7V	3500mAh	JR plug	63	45	8.5	65g
GEA35002SRXFJ	7.4V	3500mAh	Futaba-3P+ JST-EHR-2P	96	44	14	140g
GEA2S3800TXJS	7.4V	3800mAh	JST-SYP	70	52	19	140g
GEA2S4000TXJS	7.4V	4000mAh	JST-EHR	69	51	19	151.1g
GEA69001STXJR	3.8V	6900mAh	JR plug	69	49	20	122g



AIRSOFT

25IP 7.4V 7.4WH 25C

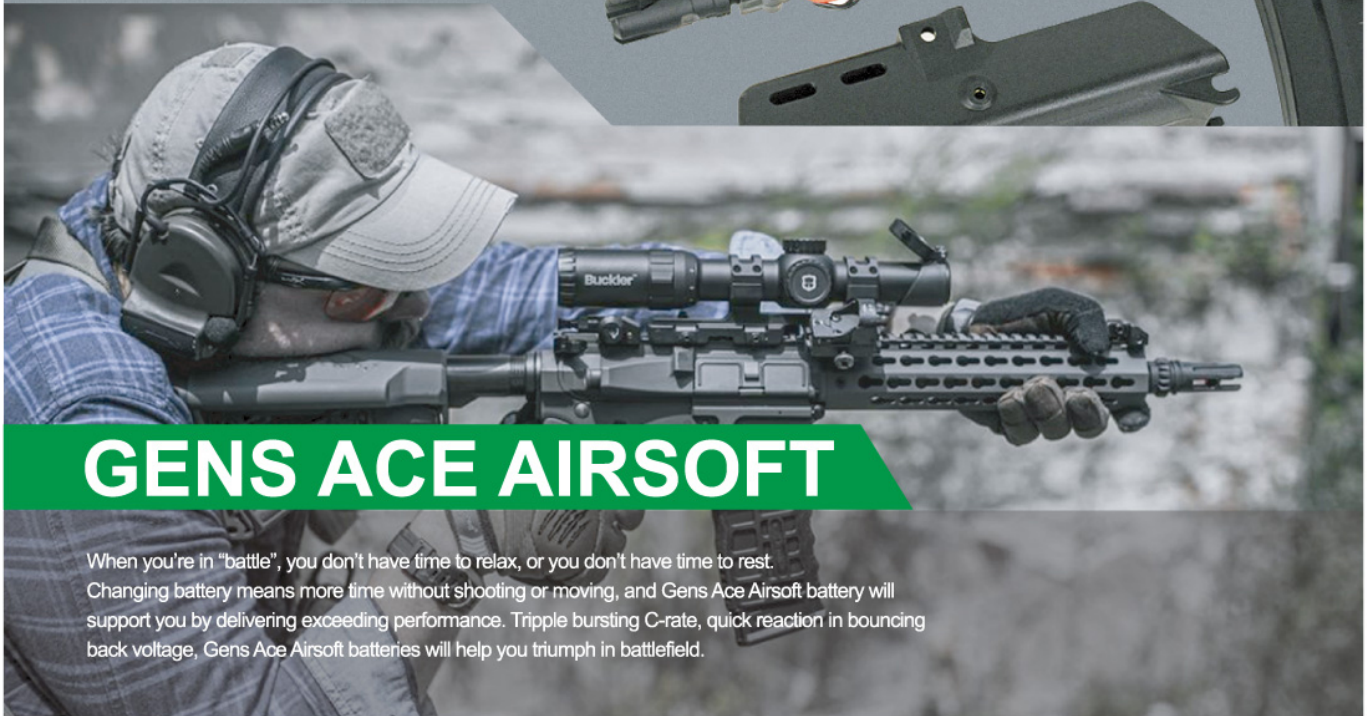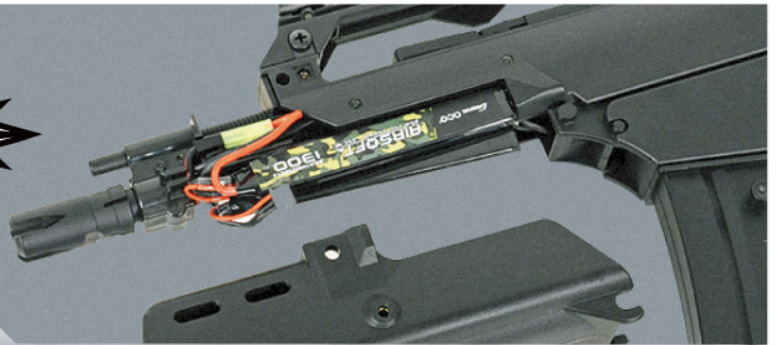

GENS ACE AIRSOFT

When you're in "battle", you don't have time to relax, or you don't have time to rest. Changing battery means more time without shooting or moving, and Gens Ace Airsoft battery will support you by delivering exceeding performance. Tripple bursting C-rate, quick reaction in bouncing back voltage, Gens Ace Airsoft batteries will help you triumph in battlefield.



800mAh-11.1V-25C

Weight: 55g Size:80*19.7*15.8mm



1000mAh-7.4V-25C

Weight: 51g Size:105*18*11mm



1100mAh-11.1V-25C

Weight: 77g Size:106*19*17mm



1200mAh-11.1V-25C

Weight: 78g Size:183*17*12mm



1500mAh-7.4V-35C

Weight: 77g Size:106*19*17mm



1500mAh-11.1V-25C

Weight: 98g Size:116*16*22.5mm



1200mAh-11.1V-25C

Weight: 83g Size:126*19*16mm



2000mAh-7.4V-25C

Weight: 90g Size:106*20*21mm



2400mAh-11.1V-25C

Weight: 156g Size:125*20*31mm



SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA2502S35J	7.4V	250mAh	35C	JST-SYP	37	20	10	17g
GEA3002S25J	7.4V	300mAh	25C/50C	JST	40	17	12	17g
GEA8003S25T	11.1V	800mAh	25C/80C	Mini Tamiya	80	19.7	15.8	52g
GEA8003S25D	11.1V	800mAh	25C/80C	T plug	80	19.7	15.8	55g
GEA8003S25D3	11.1V	800mAh	25C/80C	T plug	83	20	18	60g
GEA10002S25T	7.4V	1000mAh	25C/80C	Mini Tamiya	105	18	11	51g
GEA10002S25D	7.4V	1000mAh	25C/80C	T plug	105	18	11	50g
GEA10002S35D	7.4V	1000mAh	35C	T plug	68	30	12	53g
GEA10003S25T	11.1V	1000mAh	25C/80C	Mini Tamiya	105	18	16	72g
GEA10003S25D	11.1V	1000mAh	25C/80C	T plug	105	18	16	72g
GEA10003S25D3	11.1V	1000mAh	25C/80C	T plug	108	19	5	76g
GEA10003S35D	11.1V	1000mAh	35C	T plug	68	30	17	74g
GEA11003S25T	11.1V	1100mAh	25C/80C	Mini Tamiya	106	19	17	77g
GEA11003S25D	11.1V	1100mAh	25C/80C	T plug	106	19	17	77g
GEA12002S25T	7.4V	1200mAh	25C/80C	Mini Tamiya	126	19	11	59g
GEA12002S25D	11.1V	1200mAh	25C/80C	T plug	126	19	16	83g
GEA12003S25T	11.1V	1200mAh	25C/80C	Mini Tamiya	126	19	16	83g
GEA12003S25D	11.1V	1200mAh	25C/80C	T plug	126	19	16	83g
GEA12003S25TL	11.1V	1200mAh	25C/80C	Mini Tamiya	184	16	12	78g
GEA12003S25DL	11.1V	1200mAh	25C/80C	T plug	183	17	12	78g
GEA12003S25T2	11.1V	1200mAh	25C/80C	Mini Tamiya	126	19	16	87g
GEA12003S25D2	11.1V	1200mAh	25C/80C	T plug	126	19	16	87g
GEA13002S25T2	7.4V	1300mAh	25C/80C	Mini Tamiya	126	18	12	68g
GEA13002S25D2	7.4V	1300mAh	25C/80C	T plug	126	18	12	68g
GEA14002S25T	7.4V	1400mAh	25C/80C	Mini Tamiya	118	16	15	66g
GEA14002S25D	7.4V	1400mAh	25C/80C	T plug	118	16	15	66g
GEA14003S25T	11.1V	1400mAh	25C/80C	Mini Tamiya	193	16	12	93g
GEA14003S25D	11.1V	1400mAh	25C/80C	T plug	193	16	12	93g
GEA15002S25T	7.4V	1500mAh	25C/80C	Mini Tamiya	116	16	15	66g
GEA15002S25D	7.4V	1500mAh	25C/80C	T plug	116	16	15	66g
GEA15002S25T2	7.4V	1500mAh	25C/80C	Mini Tamiya	116	16	7.5*2	66g
GEA15002S25D2	7.4V	1500mAh	25C/80C	T plug	116	16	7.5*2	66g
GEA15002S35D	7.4V	1500mAh	35C	T plug	68	34	13	67g
GEA15003S25T	11.1V	1500mAh	25C/80C	Mini Tamiya	116	16	22	98g
GEA15003S25D	11.1V	1500mAh	25C/80C	T plug	116	16	22	98g
GEA15003S25T2	11.1V	1500mAh	25C/80C	Mini Tamiya	116	16	15+7	98g
GEA15003S25D2	11.1V	1500mAh	25C/80C	T plug	116	16	15+7	98g
GEA15003S25T3	11.1V	1500mAh	25C/80C	Mini Tamiya	116	16	7.5*3	98g
GEA15003S25D3	11.1V	1500mAh	25C/80C	T plug	116	16	7.5*3	98g
GEA15003S35D	11.1V	1500mAh	35C	T plug	72	34	19	97g
GEA20002S25D2	7.4V	2000mAh	25C/80C	T plug	106	20	21	90g
GEA3522003SD	11.1V	2200mAh	35C	T plug	105	34	21	162g
GEA24002S25D2	7.4V	2400mAh	25C/80C	T plug	130	20	12*2	150g
GEA24003S25D3	11.1V	2400mAh	25C/80C	T plug	125	20	31	156g
GEA30002S25D2	7.4V	3000mAh	25C/80C	T plug	116	16	30	119g





REDLINE 2.0



REDLINE 2.0 SERIES

Light, flexible, ideal battery for racing. Gens Ace RedLine Series aims at players who prioritize the power and duration during racing environment. 5.0mm bullet connection provides connection capability to all types of car models, and high-discharge rate, Gens Ace RedLine Series is reliable, strong, and it will meet your expectation.



1150mAh-7.6V-130C

Weight :62g Size:56*30*18.5mm



4200mAh-7.6V-140C

Weight:157g Size:96*47*18.5mm



5000mAh-7.4V-140C

Weight:224g Size:139*47*18.5mm



5300mAh-7.6V-140C

Weight:290g Size:96*47*22.5mm



6100mAh-7.6V-140C

Weight:226g Size:139*47*18.5mm



6000mAh-7.6V-140C

Weight:220g Size:96*47*25mm



6500mAh-7.6V-140C

Weight:264g Size:139*47*22.5mm



6300mAh-15.2V-140C

Weight:452g Size:139*47*37mm



6000mAh-15.2V-140C

Weight:410g Size:98*47*47mm



8000mAh-3.8V-140C

Weight :146g Size:93*47*18.5mm



9600mAh-7.6V-140C

Weight :324g Size:139*47*25mm



8500mAh-7.6V-140C

Weight :302g Size:139*47*25mm

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA11502S13E2	7.4V	1150mAh	130	EC2	56	30	18.5	62g
GEA42002S14D5	7.6V	4200mAh	140	5.0mm bullet	96	47	18.5	157g
GEA50002S14D5	7.4V	5000mAh	140	5.0mm bullet	139	47	18.5	224g
GEA53002S14D5	7.6V	5300mAh	140	5.0mm bullet	96	47	22.5	199g
GEA61002S14D5	7.6V	6100mAh	140	5.0mm bullet	139	47	18.5	226g
GEA60002S14D5	7.6V	6000mAh	140	5.0mm bullet	96	47	25	220g
GEA65002S14D5	7.6V	6500mAh	140	5.0mm bullet	139	47	22.5	264g
GEA63004S14D5	15.2V	6300mAh	140	5.0mm bullet	139	47	37	452g
GEA60004S14S	15.2V	6000mAh	140	5.0mm bullet	98	47	47	410g
GEA61002S13D	7.4V	6100mAh	130	8.0mm bullet	97	47	36	305g
GEA63002S13D	7.4V	6300mAh	130	8.0mm bullet	139	47	25	300g
GEA80001S14D5	3.8V	8000mAh	140	5.0mm bullet	93	47	18.5	146g
GEA96002S14D5	7.6V	9600mAh	140	5.0mm bullet	139	47	25	324g
GEA85002S14D5	7.6V	8500mAh	140	5.0mm bullet	139	47	25	302g

Gens ace



BASHING



GENS ACE BASHING/BASHING PRO

Gens Ace Bashing Series, the fastest RC battery ever!

The slogan could be applied in all seasons, anywhere. Any surface on the ground would prove its true. Gens Ace Bashing Series supports on-road, off-road, buggy and other car models. If you want to have the feeling of "racing", Gens Ace Bashing Series would never let you down.



400mAh-7.4V-35C
Weight: 318g Size:140*47*25mm



5500mAh-7.4V-60C
Weight: 272g Size:138*47*25mm



400mAh-7.4V-35C
Weight: 18g Size:42*19*12mm



5500mAh-7.4V-60C
Weight: 248g Size:139*48*24mm



4000mAh-7.4V-60C
Weight: 215g Size:96*47*25mm



5000mAh-7.4V-60C
Weight: 238g Size:131*42*19mm



5000mAh-11.1V-60C
Weight: 342g Size:135*43*25mm



5000mAh-11.1V-60C
Weight: 337g Size:135*43*25mm



5000mAh-14.8V-60C
Weight: 436g Size:137*43*34mm



5000mAh-1.48V-60C
Weight: 437g Size:137*43*34mm



5500mAh-11.1V-60C
Weight: 376g Size:138.5*46.9*38.8mm



5500mAh-14.8V-60C
Weight: 430g Size:138.5*46.2*49.2mm



6500mAh-11.1V-60C
Weight: 430g Size:151*46*27mm



6500mAh-11.1V-60C
Weight: 430g Size:151*46*27mm



6800mAh-11.1V-120C
Weight: 521g Size:157*48*32mm



SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA4002S35JS	7.4V	400mAh	35	JST-PHR	42	19	12	18g
GEA55002S60D10	7.4V	5500mAh	60	4.0mm Banana to T-plug	138	47	25	272g
GEA55002S60D20	7.4V	5500mAh	60	T plug	140	47	25	318g
GEA55002S60D24	7.4V	5500mAh	60	T plug	139	48	24	248g
GEA40002S60D48	7.4V	4000mAh	60	T plug	96	47	25	215g
GEA50002S60E5	7.4V	5000mAh	60	EC5	131	42	19	238g
GEA50003S60X9	11.1V	5000mAh	60	XT90	135	43	25	342g
GEA50003S60E5	11.1V	5000mAh	60	EC5	135	43	25	337g
GEA50004S60X9	14.8V	5000mAh	60	XT90	137	43	34	436g
GEA50004S60E5	14.8V	5000mAh	60	EC5	137	43	34	437g
GEA55003S60D	11.1V	5500mAh	60	T plug	138.5	46.9	38.8	376g
GEA55004S60X9	14.8V	5500mAh	60	XT90	138.5	46.2	49.2	494g
GEA65003S60X9	11.1V	6500mAh	60	XT90	151	46	27	430g
GEA65003S60E5	11.1V	6500mAh	60	EC5	151	46	27	430g
GEA68003S12E5	11.1V	6800mAh	120	EC5	157	48	32	521g
GEA68004S12E5	14.8V	6800mAh	120	EC5	157	48	41	673g
GEA68006S12E5	22.2V	6800mAh	120	EC5	157	48	60	961g
GEA8K4S100E5	14.8V	8000mAh	100	EC5	157	55	42	737g
GEA8K3S100E5	11.1V	8000mAh	100	EC5	158	47	34	507g
GEA11K4S100E5	14.8V	11000mAh	100	EC5	178	52	53	963g
GEA15K3S100E5	11.1V	15000mAh	100	EC5	178	52	53	981g



6800mAh-14.8V-120C

Weight: 673g Size: 157*48*41mm



8000mAh-14.8V-100C

Weight: 737g Size: 157*55*42mm



8000mAh-11.1V-100C

Weight: 507g Size: 158*47*34mm



11000mAh-14.8V-100C

Weight: 963g Size: 178*52*53mm



15000mAh-11.1V-100C

Weight: 981g Size: 178*52*53mm





TRX



5500mAh-7.6V-60C

Weight: 318g Size: 140*47*25mm



6800mAh-14.8V-120C

Weight: 673g Size: 157*48*41mm



8000mAh-14.8V-100C

Weight: 737g Size: 157*55*42mm



8000mAh-11.1V-100C

Weight: 507g Size: 158*47*34mm



6800mAh-14.8V-120C

Weight: 673g Size: 157*48*41mm



8000mAh-14.8V-100C

Weight: 737g Size: 157*55*42mm



8000mAh-11.1V-100C





Weight: 507g Size: 158*47*34mm

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA22002S60X6	7.4V	2200mAh	60	XT60	88	34	19	116g
GEA50002S60X6	7.4V	5000mAh	60	XT60	138	42	20	247g
GEA50003S60X6	11.1V	5000mAh	60	XT60	156	44	25	359g
GEA50003S60SX	11.1V	5000mAh	60	XT60	129	44	27	354g
GEA67504S60X9	14.8V	6750mAh	60	XT90	183	50	35	638g
GEA76002S60X6	7.4V	7600mAh	60	XT60	157	48	25	387g
GEA85004S60X9	14.8V	8500mAh	60	XT90	164	48	42	688g

GENS ACE ADVANCED

Gens Ace Advanced series batteries are the next generation of RC batteries. The Advanced series design concept is based on being a more convenient, user friendly and safety oriented series of batteries.

We produce the high quality 4.35V LiHV cells (LiPo High Voltage), hard-case, internal circuitry, power indicator lights and other smart features.

-  Voltage error indicator
-  Self-storage mode
-  LED power indicator
-  Overcharge Cut-off



5500mAh-7.6V-120C

Weight:290g Size:155*46*26mm



4500mAh-11.4V-100C

Weight: 300g Size:155*46*26mm



6800mAh-22.8V-100C

Weight: 945g Size:165*68*47mm



10000mAh-7.6V-100C

Weight:950g Size:165*68*47mm



6500mAh-11.4V-100C

Weight: 480g Size:165*47*34mm

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA55002S10X6	7.6V	5500mAh	100	XT60	155	46	26	290
GEA45003S10X6	11.4V	4500mAh	100	XT60	155	46	26	300g
GEA68006S10E5	22.8V	6800mAh	100	EC5	165	68	47	945g
GEA10K4S10E5	7.6V	10000mAh	100	EC5	165	68	47	950g
GEA65003S10E5	11.4V	6500mAh	100	EC5	165	47	34	480g



GENS ACE CAR

Do you have buggy or crawler, and you'd like to discover the environment by driving your car model? Gens Ace Cars Series provides a long list series to fit your imagination. You can either choose the soft case to be flexible to the cabin of your car or choose the hardcase to prevent influence from contact. Stability, duration, high-capacity, Gens Ace Cars will make sure your cars intact during racing.



850mAh-7.4V-60C
Weight :57g Size:58*32*20.8mm



3600mAh-11.4V-60C
Weight :218g Size:89*42*26mm





3600mAh-11.4V-60C

Weight :218g Size:89*42*26mm



4000mAh-7.4V-60C

Weight :215g Size:138*47*23mm



4300mAh-11.4V-60C

Weight :243g Size:91*41*30mm



4300mAh-11.4V-60C

Weight :246g Size:90*40*29mm



4500mAh-22.2V-60C

Weight :604g Size:139*49*46mm



6750mAh-14.8V-60C

Weight :589g Size:138*47*50mm

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
GEA8502S60E2	7.4V	850mAh	60	EC2	58	32	20.8	57g
GEA36003S60D	11.4V	3600mAh	60	T plug	89	42	26	218g
GEA36003S60T3	11.4V	3600mAh	60	XT60/T-plug	89	42	26	218g
GEA40002S60D8	7.4V	4000mAh	60	T plug	138	47	23	215g
GEA43003S60D	11.4V	4300mAh	60	T plug	91	41	30	243g
GEA43003S60T3	11.4V	4300mAh	60	XT60/T-plug	90	40	29	246g
GEA45006S60X9	22.2V	4500mAh	60	XT90	139	49	46	604g
GEA67504S60X9H	14.8V	6750mAh	60	XT90	138	47	50	589g

EC3/XT60/T-PLUG 1T03 ADAPTER

Makes The Battery Series Compatible With More Models, So You Can Use One Battery To Float On Water, Drive On Land, And Fly In The Air.

1T03
EASY AS ONE TWO THREE



1000mAh-7.4V-30C

Weight: 63g Size:69.5*34*11mm



1000mAh-11.1V-30C

Weight: 89g Size:71.5*35*17mm



1300mAh-7.4V-30C

Weight: 79g Size:69.5*34*14.5mm



1300mAh-11.1V-35C

Weight: 107g Size:71.5*35*21mm



2200mAh-7.4V-30C

Weight: 122g Size:104*34.5*14.5mm



2200mAh-11.1V-45C

Weight: 176g Size:109*33*21mm



1200mAh-11.1V-25C

Weight: 190g Size:103*33.5*25mm

**MORE
PRODUCTS**



Based on the concept for starters and freestyle flying mode, Tattu FunFly Series is the solution with features of both stunning performance and affordable cost. Tattu FunFly Series carries less weight. The light batteries with ample discharge to handle all the sharp pitches, yaws, and rolls that you're bound to make.



1300mAh-14.8V-100C

Weight: 149g Size: 73*35*28mm



1300mAh-22.2V-100C

Weight: 225g Size: 75*36*44mm



1550mAh-14.8V-100C

Weight: 180g Size: 71*35*35mm

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
TAA13003S10X6	11.1V	1300mAh	100	XT60	74	35	23	113g
TAA13004S10X6	14.8V	1300mAh	100	XT60	73	35	28	149g
TAA13006S10X6	22.2V	1300mAh	100	XT60	75	36	44	225g
TAA15503S10X6	11.1V	1550mAh	100	XT60	73	36	28	140g
TAA15504S10X6	14.8V	1550mAh	100	XT60	71	35	35	180g
TAA15506S10X6	22.2V	1550mAh	100	XT60	75	36	51	260g
TAA18003S10X6	11.1V	1800mAh	100	XT60	107	35	23	160g
TAA18004S10X6	14.8V	1800mAh	100	XT60	107	35	29	206g



TATTU SERIES

Tattu has become FPV and drone battery's Samsung in market. The brand has proven to be the leading position in the MultiGP for years. Blasting discharge current, constant performance, swift reaction in handling complex flying actions, Tattu series will be the best booster for your drones.



300mAh-3.8V-75C

Weight: 8g Size: 69*13*7mm



450mAh-7.4V-75C

Weight: 28g Size: 45*24*15mm



450mAh-7.4V-75C

Weight: 37g Size: 61*16*15mm



450mAh-11.1V-75C

Weight: 42g Size: 45*24*21mm



450mAh-11.1V-75C


Weight: 45g Size: 63*16*21mm



850mAh-11.1V-75C

Weight: 85g Size: 59*30*24mm



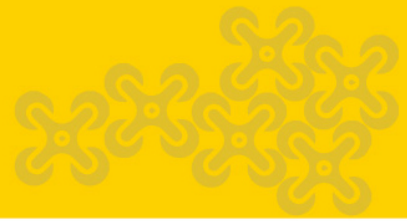

2300mAh-14.8V-75C
Weight: 270g Size: 105*33*28mm

450mAh-14.8V-75C
Weight: 55g Size: 45*24*27mm

650mAh-11.1V-75C
Weight: 59g Size: 58*31*16mm

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
TAA2701S75PH5	3.8V	270mAh	75	JST-PHR-2P	55	11	7	6.5g
TAA3001S75BT2	3.8V	300mAh	75	Beta2.0	69	13	7	8g
TAA3501S30ML1	3.7V	350mAh	30	Molex	33	20	8	9.5g
TAA6001S30JS1	3.7V	600mAh	30	JST-SYP	60	19	8	15.7g
TAA6001S30ML1	3.7V	600mAh	30	Molex	60	19	7	15.7g
TAA3002S75JST	7.6V	300mAh	75	JST-PHR	47	17	13	17g
TAA4502S75XT3	7.4V	450mAh	75	XT30	45	24	15	28g
TAA4502S75X3L	7.4V	450mAh	75	XT30	61	16	15	37g
TAA4503S75XT3	11.1V	450mAh	75	XT30	45	24	21	42g
TAA4503S75X3L	11.1V	450mAh	75	XT30	63	16	21	45g
TAA4504S75XT3	14.8V	450mAh	75	XT30	45	24	27	55g
TAA4504S75X3L	14.8V	450mAh	75	XT30	65	17	17	58g
TAA6502S75XT3	7.4V	650mAh	75	XT30	58	31	12	43g
TAA6503S75XT3	11.1V	650mAh	75	XT30	58	31	16	59g
TAA6504S75XT3	14.8V	650mAh	75	XT30	60	31	21	74g
TAA8503S75XT3	11.1V	850mAh	75	XT30	59	30	24	85g
TAA8503S75XT6	11.1V	850mAh	75	XT60	59	30	24	85g
TAA8504S75XT3	14.8V	850mAh	75	XT30	61	30	31	109g
TAA8504S75XT6	14.8V	850mAh	75	XT60	61	30	31	109g
TAA23003S75X6	11.1V	2300mAh	75	XT60	105	33	22	220g
TAA23004S75X6	14.8V	2300mAh	75	XT60	105	33	28	270g
TAA25002SGDC	7.4V	2500mAh	-	DC3.5mm	72	38	19	106g
TAA37004S45X6	14.8V	3700mAh	45	XT60	136	41	27	372g





TATTU R-LINE SERIES

Drone flight is also a sport to discover player's limitation. The sky limitation of battery performance is Tattu R-Line Series. If your drone is about fly through woods and forest, flying above lake and land, dancing with wind, Tattu R-Line Series provides high C-rate, low internal resistance and constant bursting discharge current to make the impossible possible. It's your best choice of discovering your limitation in flying.



500mAh-3.7V-95C
Weight: 15g Size: 60*19*9mm



550mAh-7.4V-95C
Weight: 30g Size: 63*16*12mm



550mAh-11.1V-95C
Weight: 43g Size: 63*18.5*21mm



650mAh-14.8V-95C
Weight: 82g Size: 61*31*25mm



750mAh-14.8V-95C
Weight: 82g Size: 60*31*28mm



850mAh-14.8V-95C
Weight: 105g Size: 61*31*31mm



1050mAh-22.2V-130C
Weight: 180g Size: 78*40*34mm



1200mAh-22.2V-150C
Weight: 196g Size: 78*40*34mm



1300mAh-22.2V-130C
Weight: 200g Size: 78*39*38mm




1400mAh-22.2V-150C

Weight: 222g Size: 78*39*42mm


1550mAh-22.2V-130C

Weight: 242g Size: 76*38*44mm


2200mAh-22.2V-95C

Weight: 321g Size: 116*34*38.5mm

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
TAA5001S95JSL	3.7V	500mAh	95	JST-PHR	60	19	9	15g
TAA5502S95XT3	7.4V	550mAh	95	XT30U-F	63	16	12	30g
TAA5503S95XT3	11.1V	550mAh	95	XT30U-F	63	18.5	21	43g
TAA5504S95X3	14.8V	550mAh	95	XT30U-F	66	19	28	60g
TAA5506S95XT3	22.2V	550mAh	95	XT30	61	17	40	86g
TAA6503S95XT3	11.1V	650mAh	95	XT30U-F	60	31	19	60g
TAA6504S95XT3	14.8V	650mAh	95	XT30U-F	61	31	25	82g
TAA6506S95XT3	22.2V	650mAh	95	XT30U-F	60	31	35	115g
TAA7503S95XT3	11.1V	750mAh	95	XT30U-F	60	31	21	62g
TAA7504S95X3	14.8V	750mAh	95	XT30U-F	60	31	28	82g
TAA8504S95XT3	14.8V	850mAh	95	XT30	61	31	31	105g
TAA8504S95XT6	14.8V	850mAh	95	XT60	61	31	31	105g
TAA8504S13X6	14.8V	850mAh	130	XT60	58	29	30	102g
TAA10506S95X6	22.2V	1050mAh	95	XT60	75	36	37	170g
TAA10504S13X6	14.8V	1050mAh	130	XT60	73	38	19	128g
TAA10506S13X6	22.2V	1050mAh	130	XT60	78	40	34	180g
TAA12006S15X6	22.2V	1200mAh	150	XT60	78	40	34	196g
TAA13004S12X6	14.8V	1300mAh	120	XT60	78	38	27	148g
TAA13004S13X6	14.8V	1300mAh	130	XT60	76	38	25	143g
TAA13006S12X6	22.2V	1300mAh	120	XT60	78	39	39	212g
TAA13006S13X6	22.2V	1300mAh	130	XT60	78	39	38	200g
TAA14004S13X6	14.8V	1400mAh	130	XT60	78	39	28	158g
TAA14006S12X6	22.2V	1400mAh	120	XT60	78	39	49	230g
TAA14006S13X6	22.2V	1400mAh	130	XT60	78	39	42	225g
TAA14006S15X6	22.2V	1400mAh	150	XT60	78	39	42	222g
TAA15504S12X6	14.8V	1550mAh	120	XT60	76	38	33	176g
TAA15504S13X6	14.8V	1550mAh	130	XT60	76	38	30	167g
TAA15506S12X6	22.2V	1550mAh	120	XT60	77	39	48	256g
TAA15506S13X6	22.2V	1550mAh	130	XT60	76	38	44	242g
TAA17006S95X6	22.2V	1700mAh	95	XT60	94	34	41	262g
TAA18004S12X6	14.8V	1800mAh	120	XT60	75	39	38	199g
TAA20004S12X6	14.8V	2000mAh	120	XT60	76	38	41	217g
TAA22005S95X6	18.5V	2200mAh	95	XT60	108	35	38	340g
TAA22006S95X6	22.2V	2200mAh	95	XT60	116	34	38.5	321g
TAA45006S95AS	22.2V	4500mAh	95	AS150	150	49	44	685g



TATTU UAV SERIES

Tattu UAV Series is expanding its capability of being part of UAV's configuration. Supporting 25kg drone, 35kg drone and up to 45kg drone, combining cells from 10S, 12S to 14S, and enlarging capacity from 10000mAh, 16000mAh to 23000mAh, Tattu UAV Series plays important role of configuring your UAV to perfection.



6750mAh-14.8V-25C

Weight: 620g Size: 139*47*50mm



12000mAh-22.2V-30C

Weight: 1532g Size: 190*71*54mm



22000mAh-22.2V-30C


Weight: 2460g Size: 206*91*61mm



20000mAh-22.2V-5C

Weight: 1950g Size: 193*78*56mm



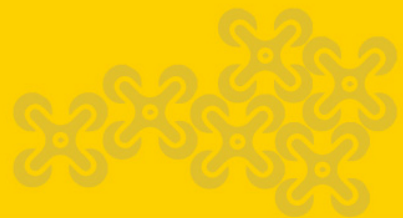

SKU	Voltage	Capacity	C-Rate	Discharge Plug	L (±5mm)	W (±5mm)	H (±5mm)	Weight
TAA45006S25X9	22.2V	4500mAh	25	XT90	138	44	56	713g
TAA67504S25X9	14.8V	6750mAh	25	XT90	139	47	50	620g
TAA70006S25X9	22.2V	7000mAh	25	XT90	136	42	68	907.5g
TAA80003S15E5	11.1V	8000mAh	15	EC5	144	71	24	529g
TAA90006S25E5	22.2V	9000mAh	25	EC5	208	73	37	1110g
TAA10K3S15E5	11.1V	10000mAh	15	EC5	166	65	31	595g
TAA10K4S30E5	14.8V	10000mAh	30	EC5	177	66	39	935g
TAA100006S30E	22.2V	10000mAh	30	EC5	175	65	58	1357g
TAA100006S30X	22.2V	10000mAh	30	XT90-S	175	65	58	1357g
TAA10K12S30AU	44.4V	10000mAh	30	AS150U	182	68	118	2741g
TAA11K6S25HVE	22.8V	11000mAh	25	EC5	176	65	56	1350g
TAA11K6S25HVX	22.8V	11000mAh	25	XT90-S	176	65	56	1350g
TAA12K4S30EC5	14.8V	12000mAh	30	EC5	193	72	37	1057g
TAA120006S30E	22.2V	12000mAh	30	EC5	190	71	54	1532g
TAA120006S30X	22.2V	12000mAh	30	XT90	190	71	54	1532g
TA-30C-14500-6S1P-XT90-S-LT	22.2V	14500mAh	30	XT90-S	190	76	65	1961g
TAA16K4S30EC5	14.8V	16000mAh	30	EC5	192	77	44	1351g
TAA16K6S30ASX	22.2V	16000mAh	30	XT150+AS150	190	76	65	1974g
TAA160006S30X	22.2V	16000mAh	30	XT90-S	190	76	65	1974g
TAA17K6S15ASX	22.8V	17000mAh	15	XT150+AS150	194	77	62	1847g
TAA17K6S15XT9	22.8V	17000mAh	15	XT90-S	194	77	62	1847g
TAA22K4S30EC5	14.8V	22000mAh	30	EC5	208	92	42	1677g
TAA22K6S30ASX	22.2V	22000mAh	30	XT150+AS150	206	91	61	2460g
TAA220006S30X	22.2V	22000mAh	30	XT90-S	206	91	61	2460g
TAA23K6S25ASX	22.8V	23000mAh	25	XT150+AS150	207	90	62	2473g
TAA23K6S25XT9	22.8V	23000mAh	25	XT90-S	208	90	63	2473g
TAA25K6S10XT9	22.8V	25000mAh	10	XT90-S	207	92	63	2525g
TAA28K6S25ASX	22.2V	28000mAh	25	AS150+XT150	200	120	65	3314g
TAA30K6S25ASX	22.2V	30000mAh	25	AS150+XT150	200	130	35	3538g
TAA32K6S10XT9	22.2V	32000mAh	10	XT90-S	218	121	63	3420g
TAA200006S5X9S	22.2V	20000mAh	5	XT90-S	193	76	58	1950g
TAA200006S5AXS	22.2V	20000mAh	5	XT150+AS150	193	78	56	1950g
TAA280006S5X9S	22.2V	28000mAh	5	XT90-S	208	92	62	2580g
TA-10C-40000-6S1P-HV	22.8V	40000mAh	10	AS150+XT150	263	122	64	4130g
TAA10K6SP25AX	22.2V	10000mAh	25	XT150+AS150	186	70	63	1466g
TAA12K6SP15AX	22.2V	12000mAh	15	XT150+AS150	202	76	61	1640g
TA-PLUS-15C-16000-6S1P	22.2V	16000mAh	15	XT150+AS150	202	88	69	2063g
TAA22K6SP25AX	22.2V	22000mAh	25	XT150+AS150	214	96	68	2640g
TAA16K12SP15A	44.4V	16000mAh	15	AS150U-F	224	163	90	4740g
TAA16KP12S15X	44.4V	16000mAh	15	XT90-S	217	80	150	4250g
TAA16KP12S15C	44.4V	16000mAh	15	AS150U-F	217	80	150	4250g
TAA22K12SP25A	44.4V	22000mAh	25	AS150U-F	236	173	116	6058g
TAPRAS22K1225X	44.4V	22000mAh	25	AS150U	238	174	117	6300g
TA3TAS22K1425X	51.8V	22000mAh	25	AS150U	279	236	91	8800g
TA3TAS25K1425X	51.8V	22000mAh	25	AS150U	279	236	91	9600g





G-TECH TECHNOLOGY



New Ecology



Smart Chip



Unique Design

More Information About the Battery





G-TECH TECHNOLOGY

- The unique design of the G-Tech balance connector is made with durability in mind and manufactured with the highest quality standards.

- G-Tech enables plug-and-play enhancing the user experience with great convenience.

- Once the charger and battery are connected, the Smart G-Battery will automatically recharge as soon as the charger countdown ends.

- It's a smart solution that's friendly and safe for batteries.

PRODUCT FEATURES

- ▶ Plug durability
- ▶ Identify battery data
- ▶ Protect batteries
- ▶ Extend battery life
- ▶ Get convenience
- ▶ Work with all chargers not only with G-Tech Charger



Gens ACC

G-Tech



G-Tech CHARGER



EASY TO USE



EASY TO TAKE



EASY TO READ



IMARS III
CHARGER PRO

IMARS DUAL

IMARS
DUAL



NO.	PARAMETERS	MINI	D300	IMARS DUAL	IMARS III PRO
1	G-Tech Smart Charging	√	√	×	×
2	Compactable with G-Tech battery	√	√	√	√
3	Net weight	64g	530g	530g	400g
4	Dimensions	85x55x21 mm	145x76x62 mm	145x76x62 mm	146x87x40 mm
5	Charge Power	60W	AC 300W; DC 350W*2	AC 100W*2; DC 300W*2	100W
6	Charge Current	0.1--5A	0.1-15A*2	0.1-15A*2	0.1A~10A
7	Discharge Current	0.1--5A	0.1~3A*2	0.1~3A*2	0.1A~1.5A
8	Output Voltage	DC 2.5~18V	DC 1~30V	DC 1~30V	26.4V
9	Output Port	XT60	XT60PW-M	XT60PW-M	XT60
10	Battery Type	LiPo/LiHv/LiFe (2~4S) NiMH (2~12S)	LiPo/LiHV/LiFe 1~6S NiMH/Cd 1~16S	LiPo/LiHV/LiFe 1~6S NiMH/Cd 1~16S	LiPo/LiHV/LiFe 1~6S NiMH Charge 1~18S NiMH Discharge 1~10S
11	Battery Type	XT60-T adapter / XT60-EC3 adapter / Power Supply (Optional)	AC Input Cable / XT60-T adapter / XT60-EC5 adapter / XT60-EC3 adapter	AC Input Cable / XT60-T adapter / XT60-EC5 adapter / XT60-EC3 adapte	AC Input Cable / Balance adapter board / XT60-T adapter / XT60-EC3 adapter



WARRANTY GUIDELINES

What does the warranty cover ?

The warranty covers any manufacturer defects in material or workmanship under normal use during the warranty period.

Examples: Dropped cell(s), cell imbalance of more than 0.20V, hard case popping, manufacturer defect upon arrival, and puffing

How long does the coverage last?

The warranty period for Gens Ace and Tattu products is 180 days from the date of purchase.

What does the warranty not cover?

The warranty does not cover normal wear and tear, physical damage (including water damage), battery failure due to over-charge or discharge, or any damage resulting from improper use or any modification of any kind (including opening of a sealed battery pack). This warranty does not cover damage due to any improper installation, operation, maintenance, abuse, or attempted repairs.

We reserve the right to review and refuse your warranty claim upon evaluation.

How do I file a warranty claim?

You will need your original proof of purchase. Contact the authorized dealer or distributor that you purchased the Gens Ace and Tattu product from. If you purchased your product directly from genstattu.com, submit an RMA (Return Merchandise Authorization) through your account or contact the USA office at (925) 364-7166

Dealers, contact your Rep and send a clear picture of the following:

- 1.The product label that contains an overview of the battery
- 2.The Zlabel barcode (Starts with Z, followed by 15 numbers)
- 3.A reading of the voltage while the battery is connected to a cell checker / charger.

GREPOW

WE POWER YOUR PASSION

WE POWER YOUR PASSION



Website: www.grepow.com
E-mail: info@grepow.com
Telephone: + 86 -755 - 88376378